

ERITECH[®]

Maximizing Your Grounding System



ERICO[®]

Maximizing Your Grounding System

From Ground Rods to Ground Enhancement Material: Get the Facts to Maximize Your Grounding System

To ensure you get the most out of your grounding system, you need to have all of the facts. Which ground rod should I choose? How will ground conditions affect my grounding system? How can I maximize my system's performance and save money, too? Turn to ERICO for the support you need.

Ground Rods: What Do the Experts Say?

There are a lot of factors to consider when determining which grounding system electrode is best for your specific application. Do you select an electrode based solely on cost? Or is your decision also influenced by longevity and performance?

If a lower purchase price is the only reason for selecting an electrode, a galvanized steel rod is the way to go. Unfortunately, a galvanized steel rod is not the most cost-effective option due to its relatively short service life.

In 1995, the Fire Protection Research Foundation established the National Electrical Grounding Research Project (NEGRP) to document the performance of grounding system electrodes over time. The NEGRP evaluated the variation of grounding electrode earth resistance at different geographic locations and explored the effects of several of the dominant variables over a period of 10 years.

The most extensive long term study on corrosion of buried copper and galvanized material was conducted between 1910–1955 by the National Bureau of Standards. The result of this study was to determine relative corrosion rates, which help set the benchmark for the use of copper-bonded ground rods to this day.

When the electrodes at selected sites were exhumed for corrosion analysis and observation, the results favored the use of copper-bonded ground rods.

- The copper-bonded grounding electrodes showed minimal corrosion when compared to galvanized rods
- Galvanized steel ground rods exhibited a loss of zinc, which resulted in excessive steel corrosion

Copper-Bonded Ground Rod	Galvanized Ground Rod
<ul style="list-style-type: none">• Cost-effective long service life	<ul style="list-style-type: none">• Lower purchase price — not as cost-effective over the expected life as Copper-bonded
<p>Copper-bonded coating:</p> <ul style="list-style-type: none">• Permanent molecular bond• Low resistance performance• High fault current capacity (IEEE® Std 80)<ul style="list-style-type: none">• Will not slip or tear when driven• Will not crack if rod is bent• Copper coating may vary to meet required standards• 10 mil (254 micron) minimum coating on rods listed to UL®467	<p>Galvanized coating:</p> <ul style="list-style-type: none">• Relatively short service life• May crack if rod is bent
<p>Carbon Steel core and tip*:</p> <ul style="list-style-type: none">• Greater tensile strength• Deep driving capability	<p>3.9 mil (99 micron) minimum coating per ASTM® 123</p>

* ERICO copper-bonded and galvanized rods



Maximizing Your Grounding System



When an ERITECH® brand of copper-bonded ground rod (top) and a copper-clad rod are subjected to the same pressure load, the inferior copper-clad rod (bottom) develops cracks and creases to the outer sheath. Damage to the rod negatively affects its serviceable life and puts the integrity of the entire electrode at risk.



Excavated after 12 years.

Top ground rod is galvanized steel, $\frac{3}{4}$ " x 10'. Bottom ground rod is copper-bonded, $\frac{5}{8}$ " x 8'. Both ground rods were driven into the soil vertically at the Pecos testing site in Las Vegas, NV in December of 1992. Both ground rods were exhumed from the site in April of 2004.

The loss of zinc on the galvanized steel rod resulted in excessive corrosion of the steel. The copper-bonded steel ground rods showed minimal corrosion.



Excavated after 11 years.

This is a galvanized steel ground rod driven into the ground vertically at the Pawnee testing site in Las Vegas, NV. This ground rod was buried from May of 1992 until March of 2003. The loss of zinc resulted in excessive corrosion of the steel. One area is reduced from a $\frac{3}{4}$ " diameter to approximately a $\frac{1}{4}$ " diameter due to the corrosion. The eventual failure would result in a potentially catastrophic loss of ground.

Maximizing Your Grounding System

The ERITECH® brand of copper-bonded ground rod has an electrolytic coating of copper deposited over a layer of nickel. This process helps ensure a long-lasting molecular bond between the copper layer and steel core. ERICO recommends copper-bonded ground rods in most soil conditions, because the copper coating will not slip or tear when driven, nor will it crack if the rod is bent. Copper-bonded ground rods have a high tensile, carbon steel core, which is ideal for deep driving, and they provide a low resistance path to ground.

When compared to stainless steel or galvanized rods, copper-bonded ground rods are a cost-effective option over the service life. It is important to note that certain soils and land fill areas may not be compatible with copper. In these situations, stainless steel rods can be used. However, the high cost of stainless steel rods often prohibits their widespread use.

The Benefits of Ground Enhancement Material


The NEGRP report also positively supported the use of ground enhancement material for a grounding system. The report showed that vertical electrodes in ground enhancement material displayed minimal corrosion.

ERITECH® brand of ground enhancement material (GEM) can be applied around the conductors in a grounding system. GEM helps to reduce soil resistivity and lower ground impedance, which facilitates the dissipation of lightning energy into the earth mass. GEM is particularly useful in areas of moisture variation, sandy soils and rocky ground.


Don't Forget the Connections

Connections are often the most critical element of a grounding system, and subsequently can become the weak point due to aging and corrosion. The preferred method of connection is the CADWELD® exothermic welding process producing a molecular bond. The capacity of a grounding circuit to protect the safety of personnel depends on the quality of the connections made.

Ground Rod Life Expectancy

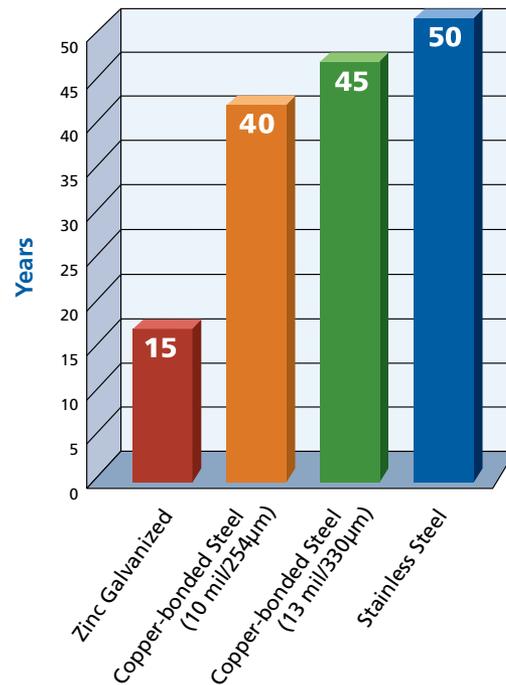

Ground Rod Annual Cost

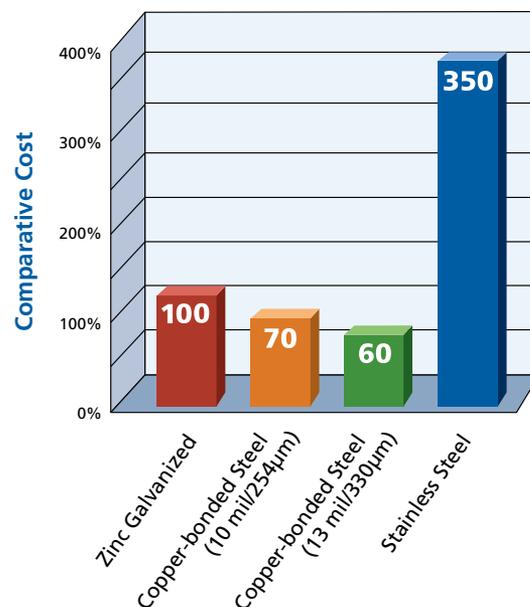

Maximizing Your Grounding System

Regular Testing

To properly design a grounding system, it is essential to test soil resistivity. The most accurate method and the one that ERICO recommends is the four-point method.

Soil resistivity should be tested before installing the ground electrode system, to make sure that the grounding system is meeting the IEEE®, NEC®, or local requirements. It is also recommended to test resistivity when expanding a building, adding significant amounts of electronics or telecommunications, installing or expanding a lightning protection system on a facility, or if the facility is experiencing problems with power quality. If the resistivity is not low enough, this may indicate that more ground rods are required.


Trust Your System to an Expert

The basic philosophy of a grounding installation should be to maximize the surface area contact of electrodes or conductors within the surrounding soil. Not only does this help to lower the earth resistance of the grounding system, but it also greatly improves the impedance of the grounding system under lightning surge conditions. *It is recommended that some form of maintenance or inspection procedure be adopted to help ensure the long-term effectiveness of a grounding system.*

ERICO's products are designed and tested to meet the most demanding requirements available. Our electrodes (copper-bonded ground rods and accessories, such as couplers and connectors) comply with EN 50164-2. Certificates and test reports are available upon request.

Trust ERICO's expertise to help keep your system operating at its full potential.

The CADWELD® Mold

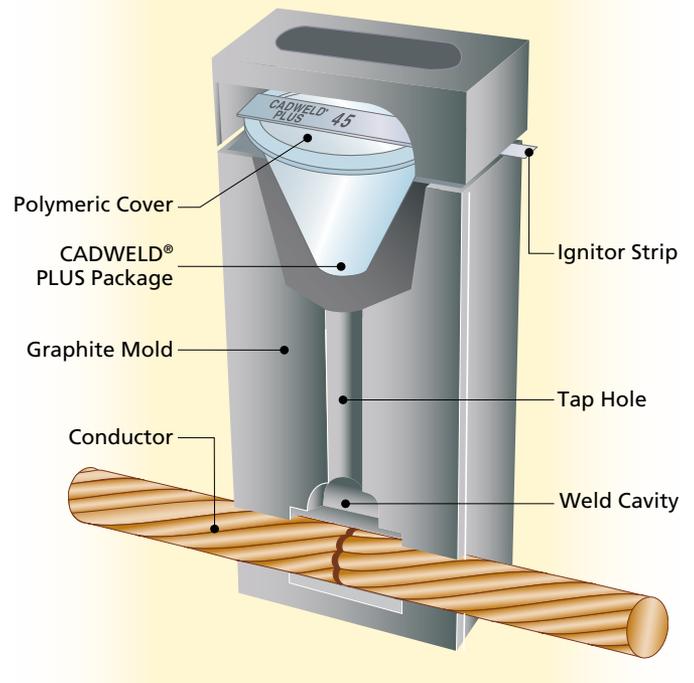

Regular ground testing is highly recommended.

Clamp-on tester

Grounding System Products

Copper-bonded Pointed Ground Rods

US Part No.	Diameter (in.)	Length (ft.)	Europe Article No.	Reference Code	Diameter (mm)	Length (m)
615850	5/8	5	155240	12M58	14,2	1,2
615860	5/8	6	155250	15M58	14,2	1,5
615880*	5/8	8	155270	21M58	14,2	2,1
615800*	5/8	10	155290	30M58	14,2	3,0
613460	3/4	6	155420	12M34	17,2	1,2
613480*	3/4	8	155430	15M34	17,2	1,5
613400*	3/4	10	155450	21M34	17,2	2,1
614400*	1.0	10	155470	30M34	17,2	3,0

* UL® Listed

Compression Couplers for Copper-bonded Pointed Ground Rods

	US Part No.	Diameter (in.)	Europe Article No.	Reference Code	Diameter (mm)
	CC58	5/8	158010	CC58	14,2
	CC34	3/4	158020	CC34	17,2

Driving Sleeves for Copper-bonded Pointed Ground Rods

	US Part No.	Diameter (in.)	Europe Article No.	Reference Code	Diameter (mm)
	B137-16	5/8	158130	DT58	14,2
	B137-18	3/4	158140	DT34	17,2
	B137-22	1.0	—	—	—

Ground Rod Clamps

	US Part No.	Conductor Range (in.)	Europe Article No.	Reference Code	Conductor Range Max. (mm ²)
	CP58	10 Sol – 4 Str	158165	CP58	25
	CP34	8 Sol – 2 Str	158165	CP34	25
	SP58	10 Sol – 2 Str	158185	SP58	10 – 25
	GC064	4 Sol – 2/0 Str	710400	GUV16070	16 – 70
	GC065	2/0 Sol – 250 MCM	710410	GUV70185	70 – 185

ERITECH® HAMMERLOCK – for Copper-bonded Ground Rod

	Global Part Number	Conductor Size Range - Imperial	Reference Code	Conductor Size Range - Metric	Ground Rod Size (in.)
	EHL58C2G	1/0 Str – 2/0 Str	EHL58C2G	50.0 mm ² Str – 70.0 mm ² Str	5/8
	EHL58C1V	4 Str – 2 Str	EHL58C1V	22.0 mm ² Str – 35.0 mm ² Str	5/8
	EHL58C1K	6 Sol – 4 Sol	EHL58C1K	10.0 mm ² Str – 16.0 mm ² Str	5/8
	EHL34C2G	1/0 Str – 2/0 Str	EHL34C2G	50.0 mm ² Str – 70.0 mm ² Str	3/4
	EHL34C1V	4 Str – 2 Str	EHL34C1V	22.0 mm ² Str – 35.0 mm ² Str	3/4
	EHL34C1K	6 Sol – 4 Sol	EHL34C1K	10.0 mm ² Str – 16.0 mm ² Str	3/4



Grounding System Products

Copper-bonded Threaded Ground Rods

US Part No.	Diameter (in.)	Length (ft.)	Europe Article No.	Reference Code	Diameter (mm)	Length (m)
635830	5/8	3	155300	S12M58	14,2	1,2
635840	5/8	4	155310	S15M58	14,2	1,5
635850	5/8	5	155330	S21M58	14,2	2,1
635860	5/8	6	155350	S30M58	14,2	3,0
635880*	5/8	8	155480	S12M34	17,2	1,2
635800*	5/8	10	155490	S15M34	17,2	1,5
633480*	3/4	8	155510	S21M34	17,2	2,1
633400*	3/4	10	155530	S30M34	17,2	3,0
634400*	1.0	10	—	—	25,4	3,0

* UL® Listed

Threaded Couplers for Copper-bonded Threaded Ground Rods

	US Part No.	Diameter (in.)	Europe Article No.	Reference Code	Diameter (mm)
	CR58	5/8	158040	SC58	14,2
	CR34	3/4	158050	SC34	17,2
	CR100	1.0	—	—	—

Driving Studs for Copper-bonded Threaded Ground Rods

	US Part No.	Diameter (in.)	Europe Article No.	Reference Code	Diameter (mm)
	DS58	5/8	158100	DS58	14,2
	DS34	3/4	158110	DS34	17,2

This list is only a sampling of our available products. To see our full line of ERITECH® products, visit www.erico.com.

Due to a policy of continuous product development, specifications are subject to change without notice.

WARNING

ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

WARRANTY

ERICO products are warranted to be free from defects in material and workmanship at the time of shipment. NO OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED (INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), SHALL EXIST IN CONNECTION WITH THE SALE OR USE OF ANY ERICO PRODUCTS. Claims for errors, shortages, defects or nonconformities ascertainable upon inspection must be made in writing within 5 days after Buyer's receipt of products. All other claims must be made in writing to ERICO within 6 months from the date of shipment or transport. Products claimed to be nonconforming or defective must, upon ERICO's prior written approval in accordance with its standard terms and procedures governing returns, promptly be returned to ERICO for inspection. Claims not made as provided above and within the applicable time period will be barred. ERICO shall in no event be responsible if the products have not been stored or used in accordance with its specifications and recommended procedures. ERICO will, at its option, either repair or replace nonconforming or defective products for which it is responsible or return the purchase price to the Buyer. THE FOREGOING STATES BUYER'S EXCLUSIVE REMEDY FOR ANY BREACH OF ERICO WARRANTY AND FOR ANY CLAIM, WHETHER SOUNDING IN CONTRACT, TORT OR NEGLIGENCE, FOR LOSS OR INJURY CAUSED BY THE SALE OR USE OF ANY PRODUCT.

LIMITATION OF LIABILITY

ERICO excludes all liability except such liability that is directly attributable to the willful or gross negligence of ERICO's employees. Should ERICO be held liable its liability shall in no event exceed the total purchase price under the contract. ERICO SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS OF BUSINESS OR PROFITS, DOWNTIME OR DELAY, LABOR, REPAIR OR MATERIAL COSTS OR ANY SIMILAR OR DISSIMILAR CONSEQUENTIAL LOSS OR DAMAGE INCURRED BY BUYER.


ERICO®



www.erico.com



AUSTRALIA
Phone 1-800-263-508
Fax 1-800-423-091



CHINA
Phone +86-21-3430-4878
Fax +86-21-5831-8177



HUNGARY
Phone 06-800-16538
Fax +39-0244-386-107



NORWAY
Phone 800-100-73
Fax 800-100-66



SWITZERLAND
Phone 0800-55-86-97
Fax 0800-55-96-15



BELGIUM
Phone 0800-757-48
Fax 0800-757-60



DENMARK
Phone 808-89-372
Fax 808-89-373



INDONESIA
Phone +62-21-575-0941
Fax +62-21-575-0942



POLAND
Phone +48-71-349-04-60
Fax +48-71-349-04-61



THAILAND
Phone +66-2-267-5776
Fax +66-2-636-6988



BRAZIL
Phone +55-11-3623-4333
Fax +55-11-3621-4066



FRANCE
Phone 0-800-901-793
Fax 0-800-902-024



ITALY
Phone 800-870-938
Fax 800-873-935



SINGAPORE
Phone +65-6-268-3433
Fax +65-6-268-1389



UNITED ARAB EMIRATES
Phone +971-4-881-7250
Fax +971-4-881-7270



CANADA
Phone +1-800-677-9089
Fax +1-800-677-8131



GERMANY
Phone 0-800-189-0272
Fax 0-800-189-0274



MEXICO
Phone +52-55-5260-5991
Fax +52-55-5260-3310



SPAIN
Phone 900-993-154
Fax 900-807-333



UNITED KINGDOM
Phone 0808-2344-670
Fax 0808-2344-676



CHILE
Phone +56-2-370-2908
Fax +56-2-369-5657




HONG KONG
Phone +852-2764-8808
Fax +852-2764-4486



NETHERLANDS
Phone 0800-0200-135
Fax 0800-0200-136



SWEDEN
Phone 020-790-908
Fax 020-798-964



UNITED STATES
Phone 1-800-753-9221
Fax +1-440-248-0723

ASTM is a registered trademark of ASTM International.

IEEE is a registered trademark of the Institute of Electrical and Electronics Engineers, Incorporated.

NEC is a registered trademark of, and National Electrical Code (NEC) standard is a copyright of the National Fire Protection Association.

UL is a registered trademark of Underwriters Laboratories, Inc.

Copyright ©2011 ERICO International Corporation. All rights reserved.

CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

www.erico.com

ERICO®

E1011B-WWEN E935LT10WWEN 10M0411